

M36 DIN rail series transformers


Class II single phase transformers with integrated screw terminals and DIN rail TS35 mounting in modular enclosures are designed according to the following specifications.

- High quality protection or safety isolating transformers designed for use in general applications
- Standard primary winding 230VAC
- Designed for continuous load
- Detailed product specification on permanent label
- High efficiency, low regulation design
- 100% electrical and flash tested
- Protected against short circuit and overload



Specifications

Power: 24 – 75 VA
Frequency: 50/60 Hz
Primary: 230 VAC
Secondary: 6-230 VAC
Isolation: 4 kV RMS
Temp. class: E (120°) / ta 40°C
Protection class: IP20
According to: EN61558-2-4, EN61558-2-6




Technical specification

Power [VA]	Overall Size W x H x D [mm]
24	71 x 86 x 54
35	88 x 90 x 58
75	160 x 90 x 58


Power [VA]	Prim.[V]	Secondary [V]										Modules
		6	9	12	15	18	24	42	48	115	230	
24	230V	6	9	12	15	18	24	42	48	115	230	4
35		6	9	12	15	18	24	42	48	115	230	5
75		6	9	12	15	18	24	42	48	115	230	9

Subject to errors and changes in product specifications.


Dimensions in mm for 4 Modules box:

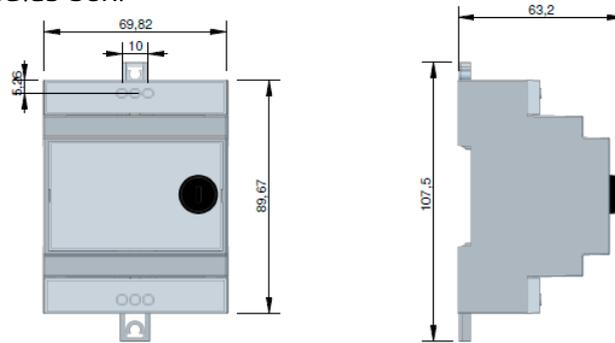


Dimensions in mm for 5 Modules box:

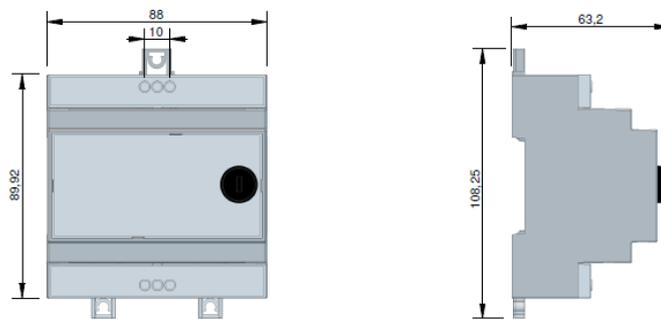

Dimensions in mm for 9 Modules box:

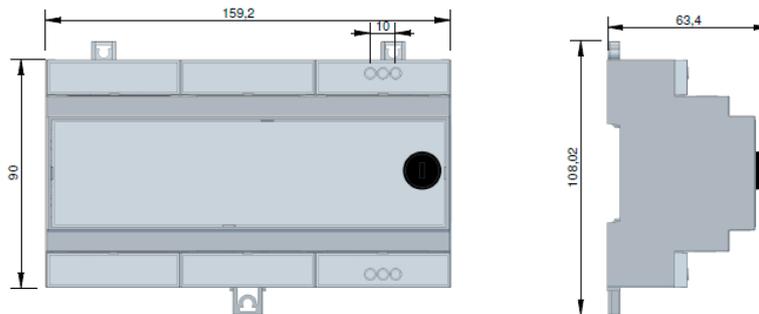

M36 DIN transformers Series line up:

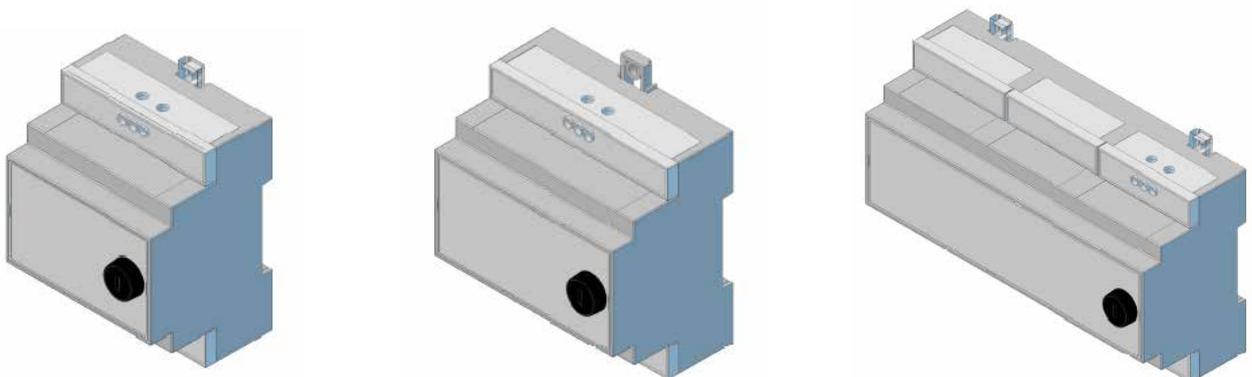

Subject to errors and changes in product specifications.